


CIRCUIT DIAGRAM FOR COBRA 148GTL-DX

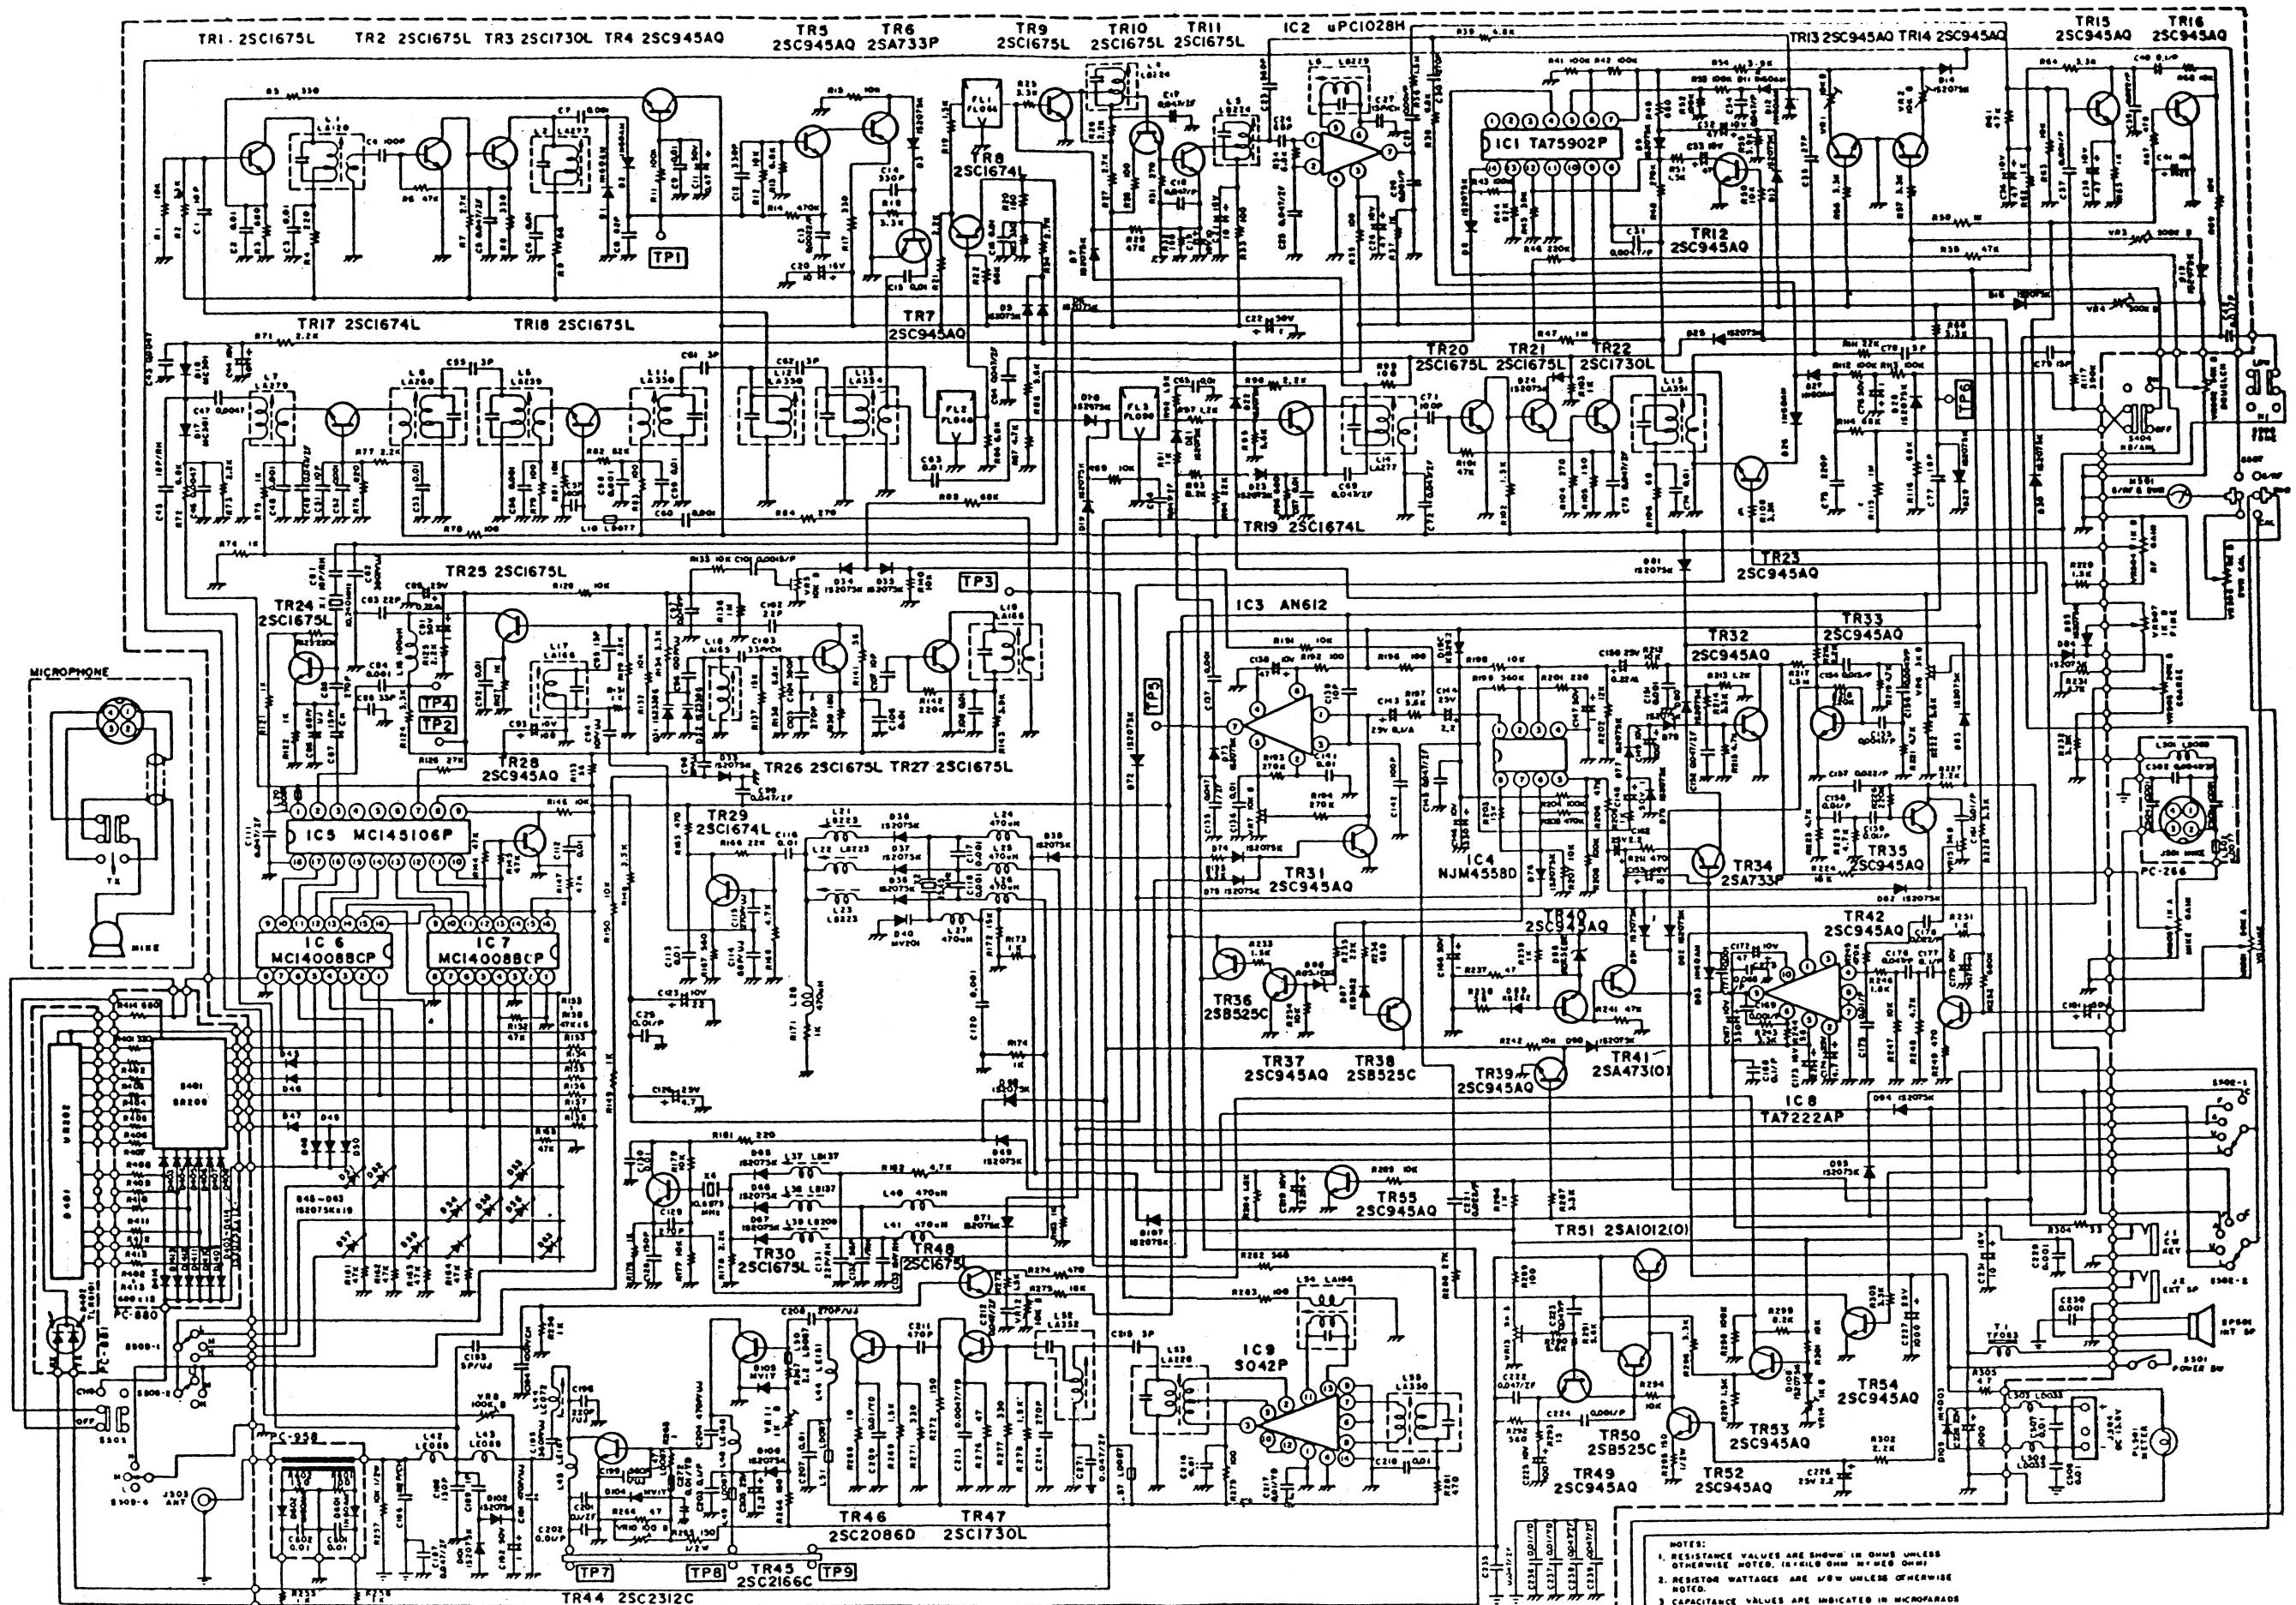

NOTES:
 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KIL OHM M=MEG OHM)
 2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P=PICOFARAD N=NEOFARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5% (LESS THAN 1000PF) OR 1% (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.