


SCHEMATIC DIAGRAM

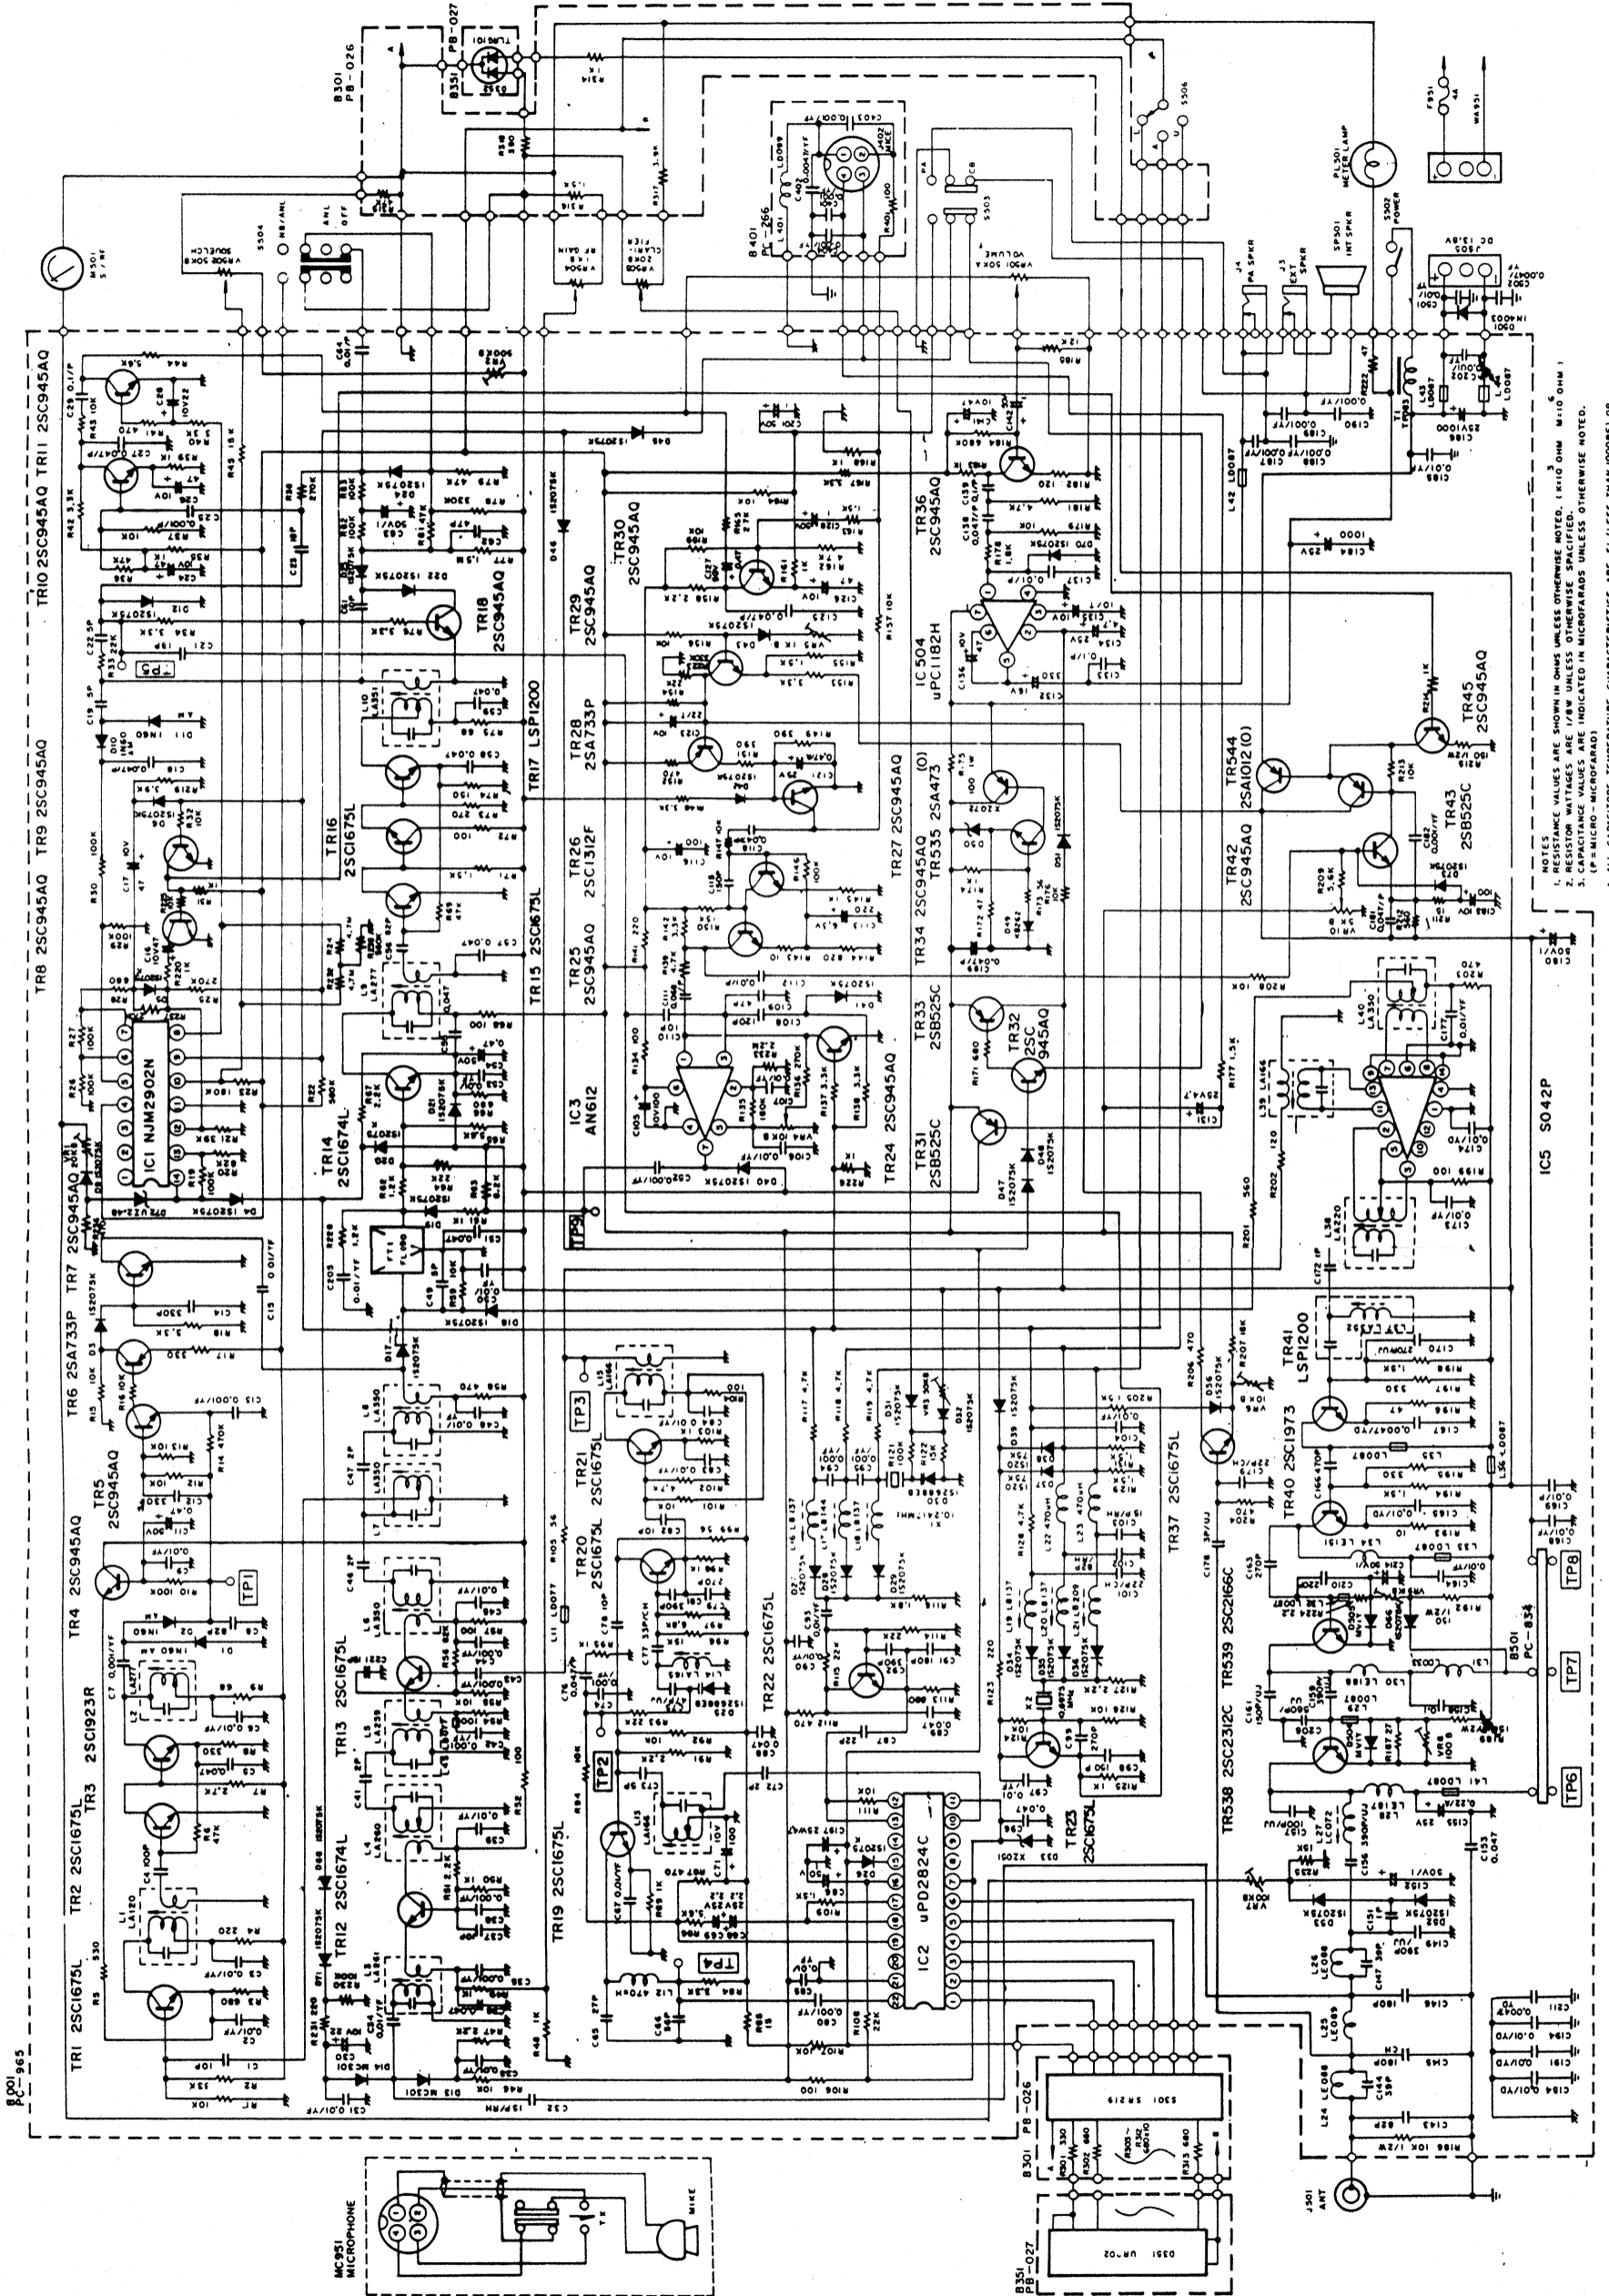

NOTES:
 1. RESISTOR VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=10³ OHMS, M=10⁶ OHMS)
 2. RESISTOR TOLERANCES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED.
 (P=PICTO-MICROFARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5% (LESS THAN 1000PF) OR 2% (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.